WBPF-D003

Electrical Specifications

Parameter	Frequency [MHz]	Specification -40℃ to 85℃	Typical Value @25℃
Center Frequency	4900		
Band Width	200		
Insertion Loss	4800 – 5000	2.5dB max	1.8dB
Passband Ripple	4800 – 5000	1.2dB max	0.6dB
Return Loss	4800 – 5000	10dB min	14dB
Attenuation			
Impedance		50 Ohm	50 Ohm
Input power		1Watt max	

Electrical Performance

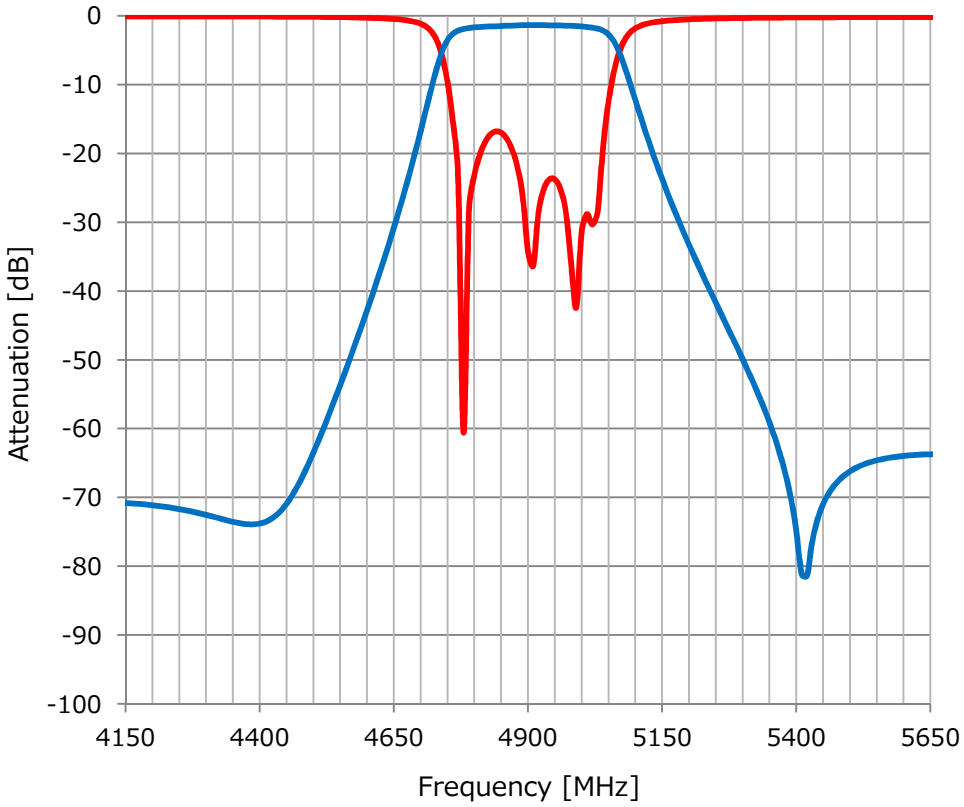

All rights reserved. All Specifications are subject to change without notice.

Mechanical Dimension

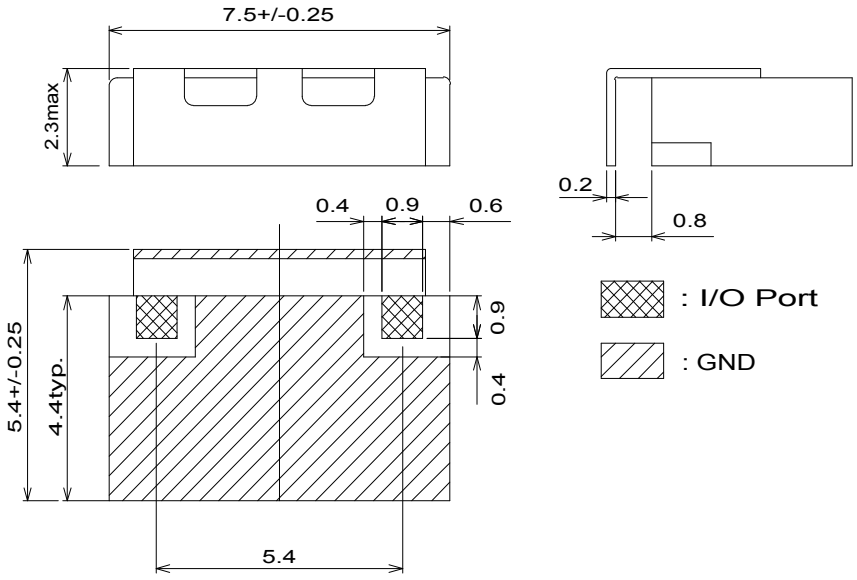

Bottom View

Units : mm

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

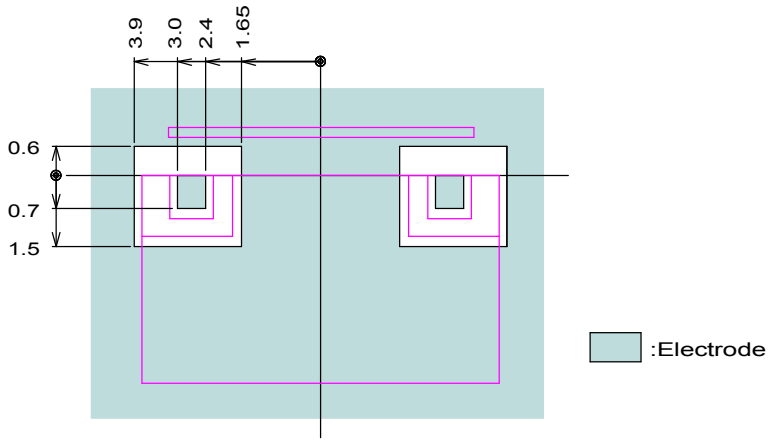

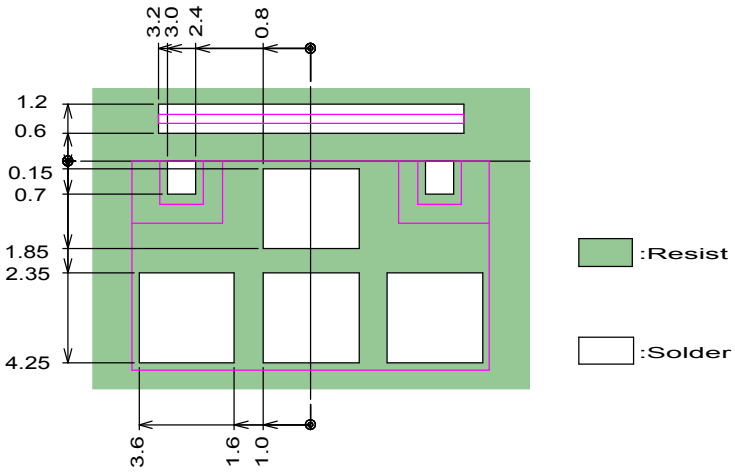

Units : mm

All rights reserved. All Specifications are subject to change without notice.